


REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

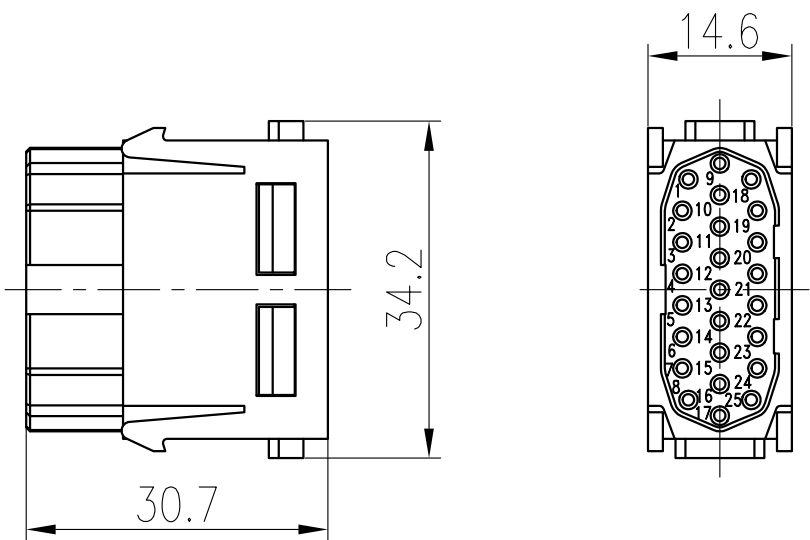




**技术参数:**  
 插芯:  
 插针数: 25  
 额定电流: 4A  
 工作电压: 50V  
 额定耐受脉冲电压: 0.8KV  
 污染等级: 3  
 材料: Polycarbonate

**Specifications:**  
 Inserts:  
 Number of contacts: 25  
 Rated current: 4A  
 Rated voltage: 50V  
 Rated impulse voltage: 0.8KV  
 Pollution degree: 3  
 Material: Polycarbonate

**插针:**  
 接线方式: 冷压连接  
 材料: 铜合金  
 表面处理: 镀银  
 接触电阻:  $\leq 3m\Omega$   
 线径范围: 0.09~0.82mm<sup>2</sup> (AWG28-18)

**Contacts:**  
 Terminal: Crimp terminal  
 Material: Copper alloy  
 Surfac: hard-silver plated  
 Contact resistance:  $\leq 3m\Omega$   
 Crimp terminal  
 Wire gauge—mm<sup>2</sup>: 0.09~0.82mm<sup>2</sup>  
 Wire gauge—AWG: 28-18

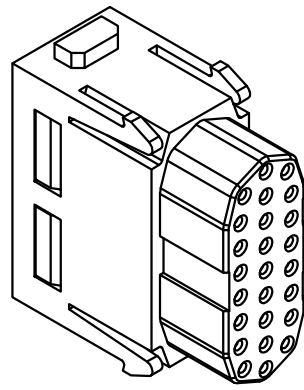

Tolerance		SIGNATURE	DATE	Units	mm	 宁波欧科瑞连接器有限公司 NINGBO OUKERUI CONNECTOR CO.,LTD.	
0~ $\leq 20$	$\pm 0.15$	DRAW		Size	A4		
20~ $\leq 50$	$\pm 0.25$	DESIGN		Scale		PART NAME: HZW-HMDS-025-FC	
50~ $\leq 80$	$\pm 0.35$	CHECK		Sheet		Drawing NO.	REV
80~ $\leq 120$	$\pm 0.50$	APPROVE		Proj.		Material	A