

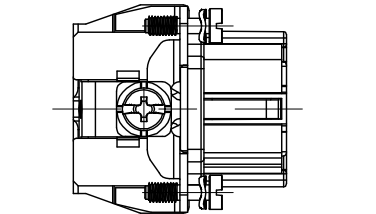
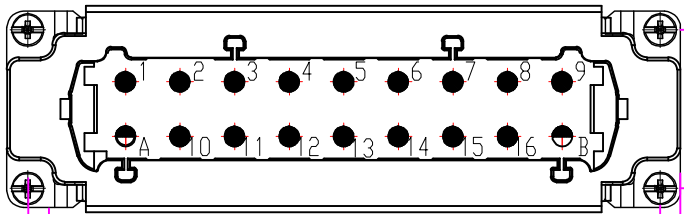
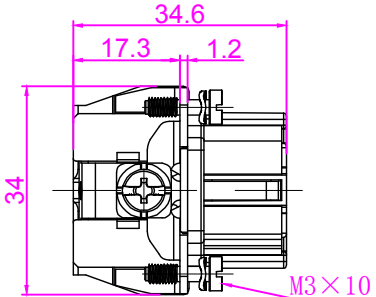


		REVISION DATA			
SYM	ECN	DESCRIPTION	DATE	APPROVED	

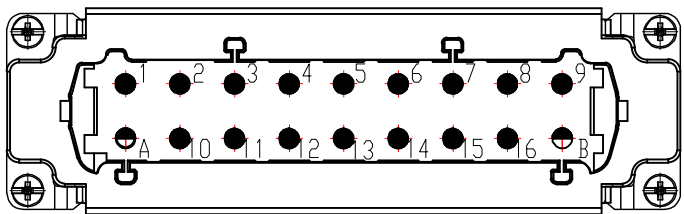


技术参数:  
 插芯:  
 插针数: 32+4+PE  
 额定电流: 16A  
 工作电压: 830V  
 额定脉冲电压: 8KV  
 污染等级: 3  
 依据UL/CSA的额定电压: 600V  
 绝缘阻抗:  $\geq 10^{10}\Omega$   
 材料: 聚碳酸酯  
 温度范围:  $-40^{\circ}\text{C}\sim+125^{\circ}\text{C}$   
 依据UL94的阻燃等级: V0  
 可插拔次数:  $\geq 500$


Specifications:  
 Inserts:  
 Number of contacts: 32+4+PE  
 Rated current: 16A  
 Rated voltage: 800V  
 Rated impulse voltage: 8KV  
 Pollution degree: 3  
 Rated voltage acc.to UL/CSA:600V  
 Insulation resistance:  $\geq 10^{10}\Omega$   
 Material: Polycarbonate  
 Limiting temperatures:  $-40^{\circ}\text{C}\sim+125^{\circ}\text{C}$   
 Flammability acc.to(UL94): V0  
 Mechanical working life -mating cycles:  $\geq 500$



Contacts:  
 Terminal: screw terminal  
 Material: Brass  
 Surfac: hard-silver plated  
 Contact resistance:  $\leq 1\text{m}\Omega$   
 Crimp terminal  
 Wire gauge--mm<sup>2</sup>: 1.0~2.5mm<sup>2</sup>  
 Wire gauge--AWG: 18-14  
 Tightening/Test torque: 0.5N·m  
 Stripping length:7-9mm

插针:  
 接线方式: 螺钉连接  
 材料: 铜合金  
 表面处理: 镀银  
 接触电阻:  $\leq 1\text{m}\Omega$   
 线径范围: 1.0~2.5mm<sup>2</sup> (AWG18-14)  
 拧紧力矩: 0.5N·m  
 剥线长度: 7-9mm

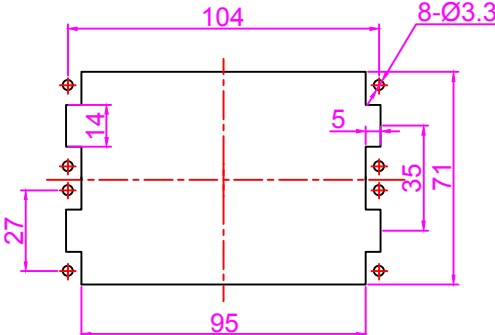

面板开孔图  
 Panel cut

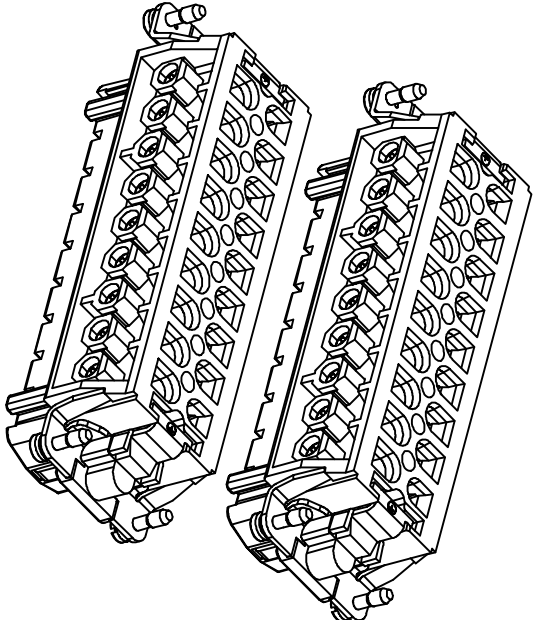

Tolerance		SIGNATURE	DATE	Units	mm	 宁波欧科瑞连接器有限公司 NINGBO OUKERUI CONNECTOR CO.,LTD.
0~ $\leq 20$	$\pm 0.15$	DRAW		Size	A4	
20~ $\leq 50$	$\pm 0.25$	DESIGN		Scale		PART NAME: HZW-HVE-032-F
50~ $\leq 80$	$\pm 0.35$	CHECK		Sheet		Drawing NO.
80~ $\leq 120$	$\pm 0.50$	APPROVE		Proj.		Material
						REV
						A